



Toshiba Satellite C55-C5268 Hard Drive Replacement

This guide will show you how to remove and replace the hard drive of your Toshiba Satellite laptop.

Written By: Greg Smith



INTRODUCTION

The hard drive of a laptop is where all the data is stored. From your operating system to those pictures of your dogs, it's all located within this unassuming gizmo. If a hard drive fails, it can be catastrophic. Be sure to back up important data regularly!



TOOLS:

- [Spudger](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
-


Step 1 — Battery



- Unplug and power off the laptop.

⚠ Opening the inside of the laptop before it is completely off poses safety risk of electric shock.

Step 2

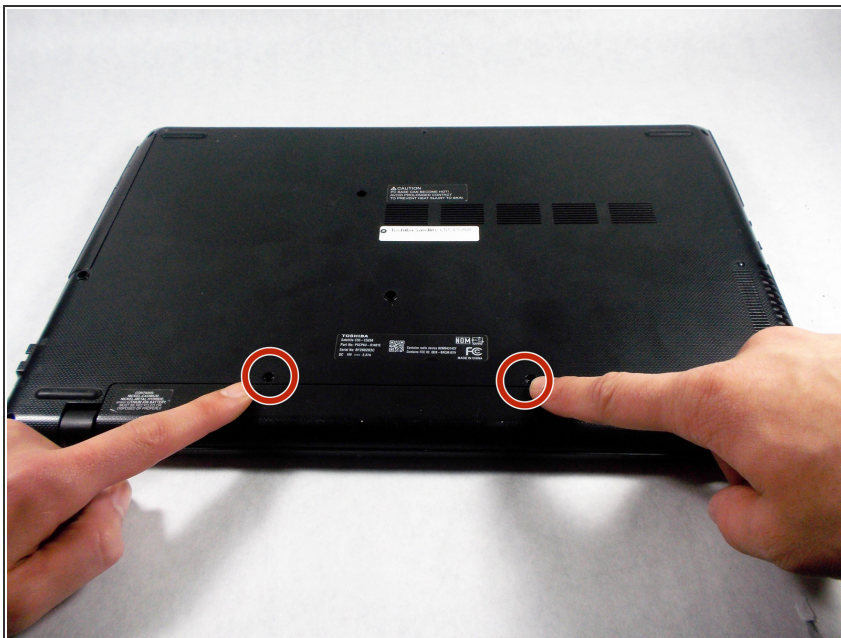


- Unscrew the two 9.0mm screws holding the battery in place using a #1 Phillips screwdriver.

Step 3




- Grab the battery and pull it away from the laptop to remove it.
- ⓘ This doesn't require a lot of effort, so you don't have to pull too hard.


Step 4 — Back Panel

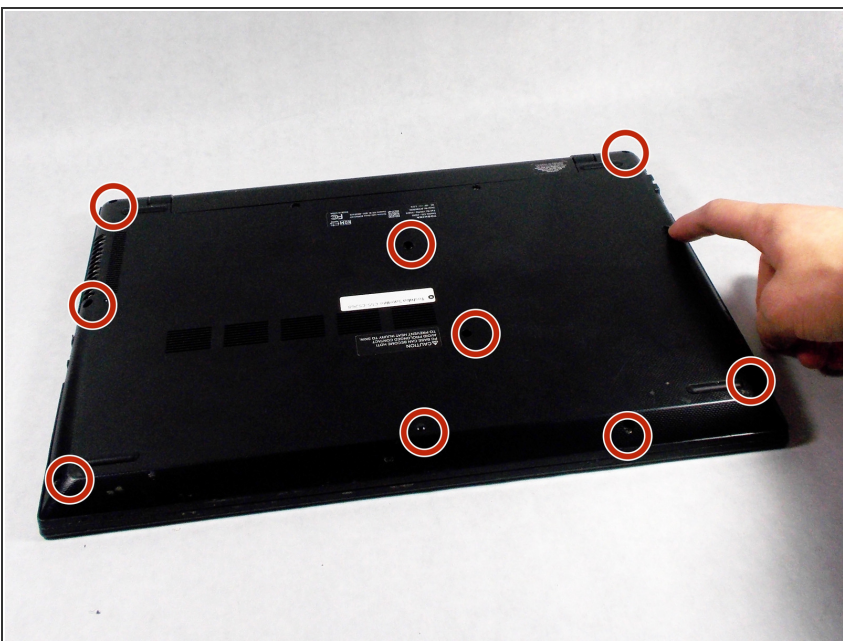

- Unscrew the 10 9.0 mm screws holding the back panel on using a Phillips head #1 screwdriver.


Step 5

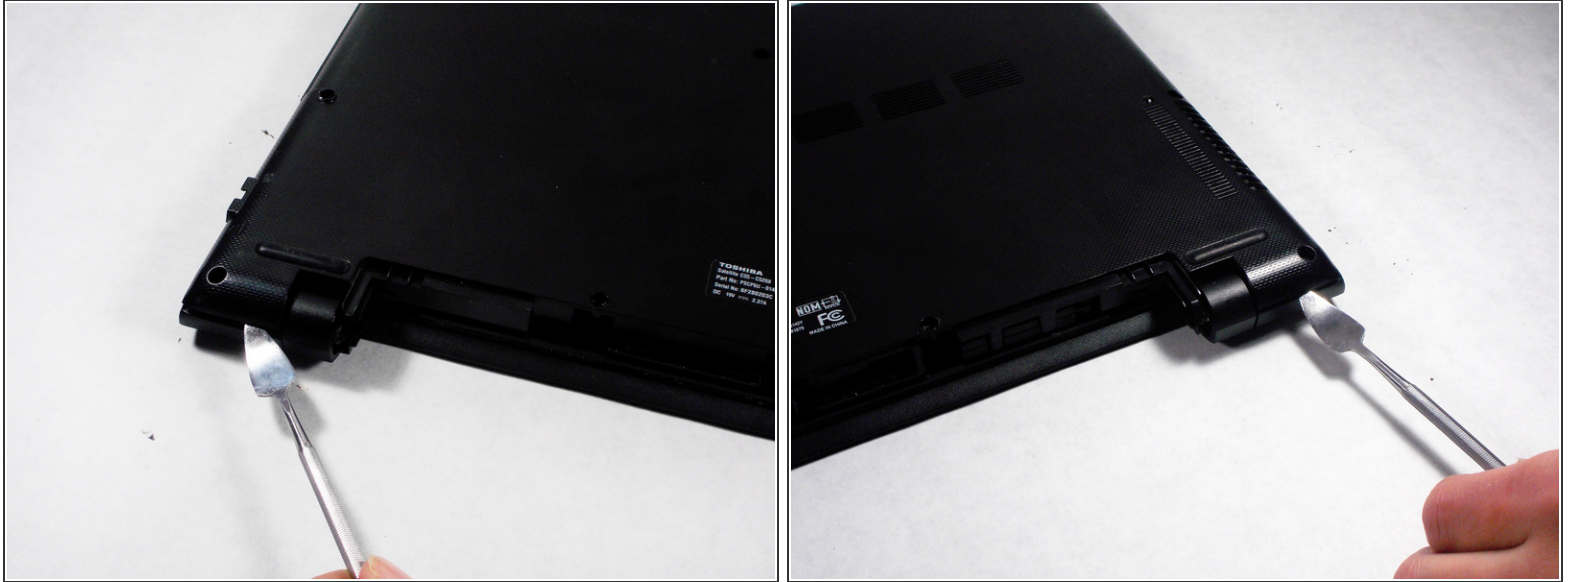

 Using a metal spudger can damage sensitive components.


- Insert a metal spudger tool in the seam between the back cover and the laptop itself. Gently run the spudger around the edge to pop the cover off.

Step 6

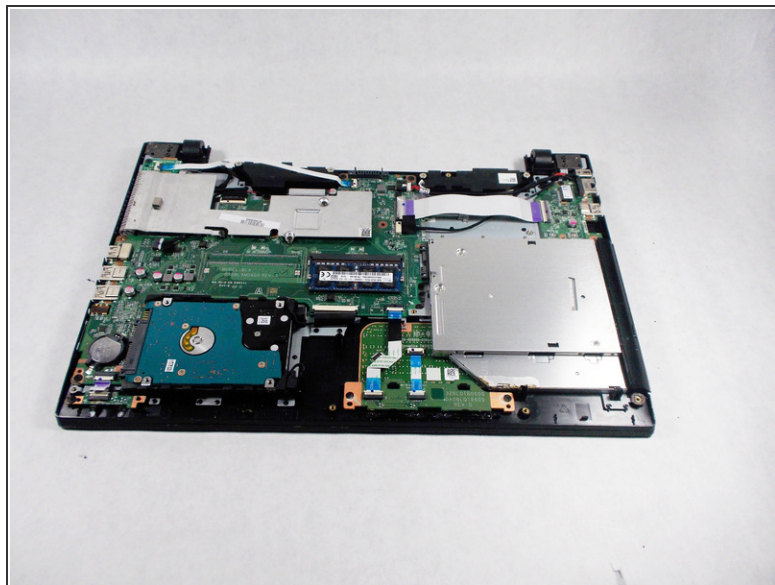


- Pry up the back panel from the rest of the laptop using a spudger.
- ⓘ It is best to start around the USB port and work your way around the edge until the panel completely snaps off.

Step 7 — Hard Drive

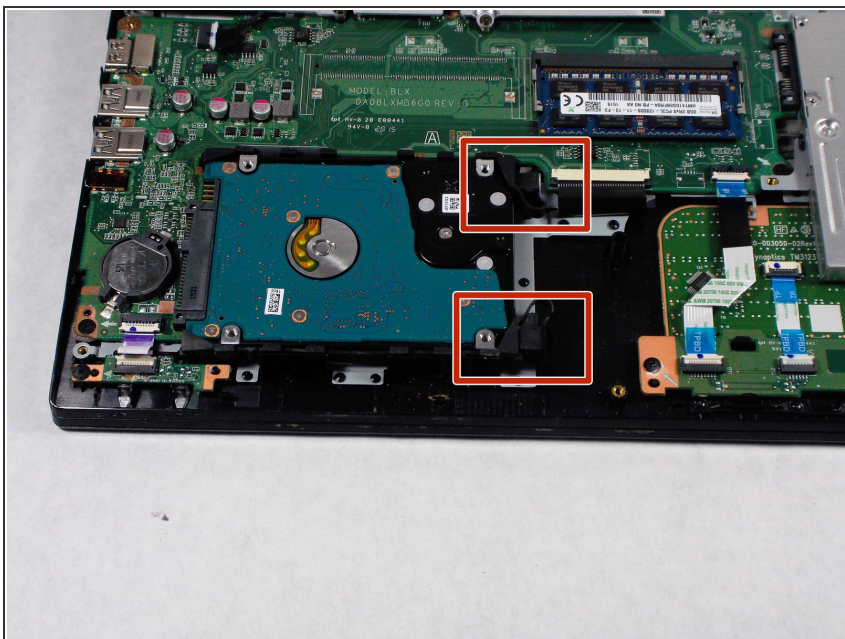

- Pull the two rubber stops upward to move them out of the way and free the hard drive.

Step 8

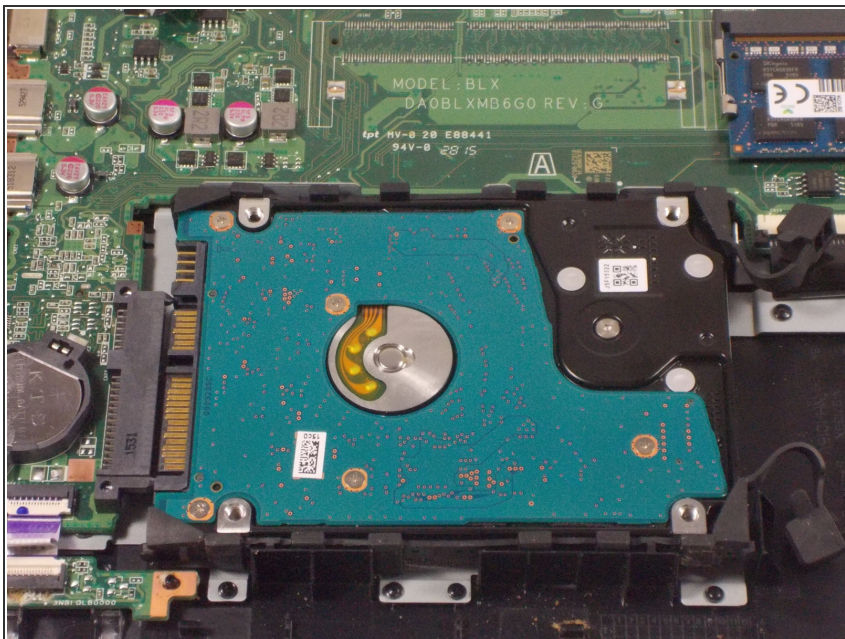

- Slide the hard drive to the right towards the stops. This disconnects it from the motherboard.
- ⓘ This will require some force to slide the hard drive.

Step 9



- The hard drive can be lifted out for replacement.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 04:37:10 PM.